

JIANG YAO^{1*}, CHUNHUI LIU², GUICHEN HUANG²,
KAI XU², QINGBO YUAN²

MULTI-SOURCE AND MULTI-TARGET IRON ORE BLENDING METHOD IN OPEN PIT MINE

Iron ore blending in an open-pit mine is an important means to ensure ore grade balance and resource recycling in iron mine industrial production. With the comprehensive recovery and utilisation of resource mining, the multi-source and multi-target ore blending method has become one of the focuses of the mining industry. Scientific and reasonable ore blending can effectively reduce the transportation cost of the enterprise. It can also ensure that the ore grade, washability index and iron carbonate content meet the requirements of the concentrator and significantly improve the comprehensive utilisation rate and economic benefits of the ore. An ore blending method for open-pit iron ore is proposed in this paper. The blending method is realised by establishing the ore blending model. This model aims to achieve maximum ore output and the shortest transportation distance, ore washability index, total iron grade, ferrous iron grade and iron carbonate content after the ore blending meets the requirements. This method can meet the situation of a single mine to a single concentrator and that of a single mine to multiple concentrators. According to the results of ore blending, we can know the bottleneck of current production. Through targeted optimisation management, we can tap the production potential of an open-pit mine.

Keywords: Iron Ore blending; Multi-source and Multi-target; Open Pit Mine


1. Introduction

China is the largest iron and steel country in the world, accounting for more than 55% of the world's output, and also the largest consumer of steel, reaching more than 1.2 billion tons. However, Chinese iron ore mainly depends on imports, with an iron ore output (OO)

¹ NORTHEASTERN UNIVERSITY, COLLEGE OF RESOURCES AND CIVIL ENGINEERING, SHENYANG, LIAONING 110819, CHINA

² ANSTEEL GROUP GUANBAOSHAN MINING CO., LTD, ANSHAN, LIAONING 114000, CHINA

* Corresponding author: 2010391@stu.neu.edu.cn



© 2022. The Author(s). This is an open-access article distributed under the terms of the Creative Commons Attribution-NonCommercial License (CC BY-NC 4.0, <https://creativecommons.org/licenses/by-nc/4.0/deed.en>) which permits the use, redistribution of the material in any medium or format, transforming and building upon the material, provided that the article is properly cited, the use is noncommercial, and no modifications or adaptations are made.

of 866.72 million tons in 2020 and an iron ore import of 1170.1 million tons, accounting for more than 57%. Chinese iron ore reserves are ranked fifth in the world, with 63.6 billion tons. However, Chinese domestic iron ore grade is poor, accounting for more than 80%. The ore grade is low, there are many multi-element composite ores, the ore body is complex, hematite and magnetite are associated with it, making it difficult to beneficiate. Iron ore blending in open-pit mines is an essential means to ensure ore grade balance and resource recycling in iron mine industrial production. With the comprehensive recovery and utilisation of resource mining, the multi-source and multi-target (MSMT) ore blending method has become one of the focuses of the mining industry. Scientific and reasonable MSMT ore blending can effectively reduce the transportation cost of the enterprise. It ensures that the ore grade (OG) and washability index (WI) meet the requirements of the concentrator, and significantly improves the comprehensive utilisation rate and economic benefits of the ore.

At present, the research on ore blending optimisation is predominantly divided into three categories: the first is the application of mathematical programming method in ore blending optimisation, which is mainly used in the modelling of the ore blending plan of an open-pit mine; The second is the research of intelligent optimisation algorithm in ore blending, including genetic algorithm, particle swarm optimisation, immune clonal selection algorithm, etc.; The third is the application of computer and intelligent ore blending systems, which is more common in open-pit mine ore blending management systems.

The mathematical programming method is mainly used for the modelling of ore blending optimisation in an open-pit mine. The objective function of the model is to achieve maximum profit and mining quantity, minimum grade deviation and minimum total cost, and the constraints generally consider the equipment production capacity, ore quality, task quantity, etc. Linear programming is one of the earliest mathematical programming methods used in the optimisation modelling of open-pit mine blending. In the early stage of research, many scholars actively applied it to the optimisation modelling of production planning and solved many problems in mine blending. Some scholars have applied the SIP (Stochastic Integer Programming) model to the ore blending [1-6]. Liu et al. [7] established an ore matching model by linear programming, which solved the problem of ore matching for simultaneous mining of multiple coal seams. Some scholars use integer dynamic programming to calculate ore blending schemes [8,9]. Moreno et al. [10] considered the impact of ore storage on production and constructed multiple linear programming models to optimise production planning. Compared with the nonlinear model, the effect is significant. Some studies use metaheuristics to solve the problem of ore blending [11-16].

An intelligent optimisation algorithm has considerable advantages in solving the optimisation model. With the continuous in-depth study of open-pit ore blending optimisation, the model is more and more complex. Jélvez et al. [17] proposed a new aggregation and decomposition heuristic algorithm for plan optimisation. The algorithm can obtain a feasible approximate optimal solution with low time complexity, which provides a solution for solving large-scale problems. Sattarvand et al. [18,19] proposed a heuristic approximation algorithm based on the ant colony algorithm, which was applied to the planning of open pit mine, and considered the influence of ore grade uncertainty in the planning process. Dervis Karaboga [20] proposed a relatively new evolutionary algorithm, the artificial bee swarm (ABC) algorithm. The colony of artificial bees contains three groups of bees: employed bees, onlookers, and scouts in the ABC algorithm [21]. Li [22] used a new ABC algorithm and a wavelet neural network (WNN) to predict the gold price. Bahram and Nader [23] combined ABC with radial basis function (RBF) and backpropagation

(BP) neural network to predict phosphate ore grade. Chen et al. [24] introduced the differential evolution (DE) algorithm and ABC algorithm into the new ABC search equation in order to improve the convergence speed of the algorithm. Anuar [25] combines the artificial neural network with ABC to apply the proposed algorithm to the classification of criminal data while avoiding the problems that neural networks can easily fall into the local optima. Ghanem [26] combined ABC with particle swarm optimisation (PSO) and tested the classification accuracy of the method on multiple datasets. Cui et al. [27] proposed an ABC algorithm based on distance fitness and verified it with a standard data set. Tosun et al. [28] established a relationship to determine the optimal number of trucks.

The research object of computer and intelligent ore blending systems is the system problems with large scale, complex structures and a large amount of information. Its control and planning process involves a lot of calculation and information processing, which is beyond the reach of human beings. With the development trend of digitalisation and intellectualisation in mines, the application of computers has been accelerated, and the role of ore blending systems in mine production has become increasingly prominent. Therefore, various types of mine production software and ore blending systems began to appear. Some studies proposed an expert decision support system for ore blending, which considered the balance of macro and micro ore quality. Gema et al. [29] aimed at determining an exploitability index with geographical information systems tools. Because of the limitation of the development level of computers at that time, it was not widely used, but it marked the arrival of intelligent ore blending. Other studies proposed a large-scale integrated hardware and software ore blending system for mining and beneficiation combined production. This improved the control level of ore quality and set a precedent for Chinese mining and beneficiation combined ore blending.

The following sums up the deficiencies of existing research:

- (1) Large-scale open-pit iron ore production may need to provide ore to many concentrators. Each concentrator for the ore requirements may be different, which increases the difficulty of ore blending. This results in the actual production of ore blending, and the existing ore blending method cannot solve the actual demand for open-pit iron ore for MSMT ore blending.
- (2) Most of the research on ore blending optimisation of open-pit mines mainly focuses on a single mineral resource, but most of the mineral resources do not exist independently. For example, iron exists in nature as a variety of compounds, and different forms of existence also have different treatment methods for the follow-up beneficiation process.
- (3) The current computer and intelligent ore blending system is still a relatively single-function system, which cannot be combined with a mine digital geological system or open-pit truck dispatching system. These systems cannot complete a more accurate and faster intelligent ore blending.

To solve the above technical problems, meet the actual demand for MSMT ore blending in the current open-pit iron mine, and solve the existing problems, an ore blending method is proposed in this paper. By establishing an ore blending model with the maximum OO and the shortest transportation distance as the goal, and with the constraints of WI, total iron grade (TFeG), ferrous iron grade (FFeG) and iron carbonate content (FeCO_3G) after ore blending. The MSMT ore blending optimization of open-pit iron ore is realised. The purpose is to make the mixed ore properties more convenient for production, thus improving production efficiency and reducing production costs.

In view of the situation that the open-pit iron ore supplies ore to many concentrators, the ore blending model is designed so that the method can meet the situation of a single mine to a single concentrator and that of a single mine to multiple concentrators. Van Tonder et al. [30] proved that well-mixed ore properties significantly impact flotation production. The ore blending conditions are restricted by specifying whether the electric shovel draws ore, the range of production capacity of the electric shovel in the ore blending period, the range of OO at each ore unloading point (OUP), the range of mining WI, the range of TFeG, the range of FFeG and the range of FeCO_3G , so as to make the ore blending closer to the actual production. Ore blending results are generated according to the selected ore blending time period, which makes the software more flexible and meets the ore blending requirements of different time dimensions. According to the results of ore blending, we can know the bottleneck of current production. Through targeted optimisation management, we can tap the production potential of an open-pit mine.

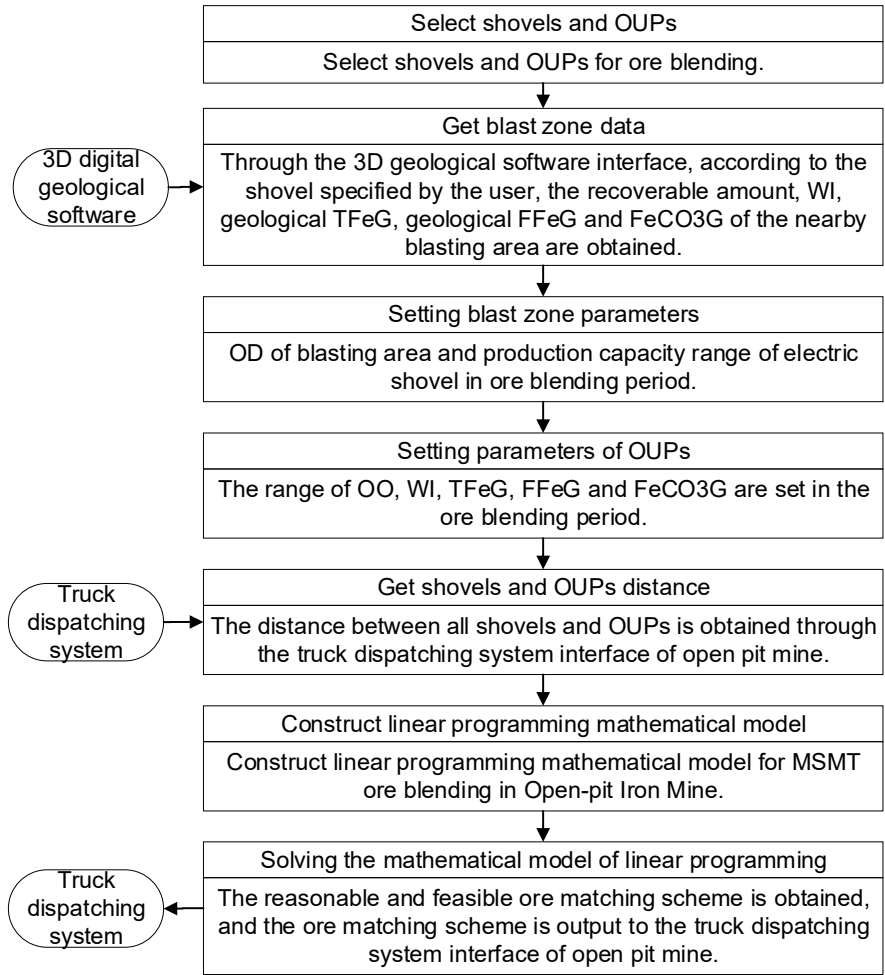


Fig. 1. Schematic diagram of ore blending process

2. Ore blending method and processing

As shown in Fig. 1, The ore blending method and process mainly include the following steps. Step 1: Selection shovels and OUPs; Step 2: Get blast zone data; Step 3: Setting blast zone parameters; Step 4: Setting parameters of OUPs; Step 5: Get shovels and OUPs distance; Step 6: Construction of linear programming mathematical model for ore blending; Step 7: Solving the mathematical model of linear programming for ore blending.

2.1. Select shovels and OUPs

Select shovels and OUPs for ore blending. Suppose there are n electric shovels, $i = 1, 2, 3, \dots, n$; There are m OUPs, $j = 1, 2, 3, \dots, m$.

2.2. Get blast zone data

Through the 3D geological software interface, according to the shovel specified by the user, the recoverable amount, geological WI, TFeG, FFeG and FeCO_3G of the nearby blasting area are obtained. Among them, Q_i is the recoverable amount of the explosive area where the number i shovel is located, GP_i is the geological WI, GT_i is the geological TFeG, GF_i is the geological FFeG, and GC_i is the geological FeCO_3G .

2.3. Setting blast zone parameters

Ore dilution (OD) of blasting area and production capacity range of electric shovel in ore blending period. Among them, R_i is the OD of the blasting area where the number i shovel is located, $SMIN_i$ and $SMAX_i$ is the minimum and maximum production capacity of the shovel in the ore blending time period.

2.4. Setting parameters of ore OUPs

The range of OO, WI, TFeG, FFeG and FeCO_3G is set in the ore blending period. Among them, $UMIN_j$ and $UMAX_j$ are the lower limits (LL) and upper limit (UL) of ore production in the ore blending time period of the j OUP, $PPMIN_j$ and $PPMAX_j$ are LL and UL of mining WI, $PTMIN_j$ and $PTMAX_j$ are LL and UL of mining TFeG, $PFMIN_j$ and $PFMAX_j$ are LL and UL of mining FFeG, $PCMIN_j$ and $PCMAX_j$ are LL and UL of the mining FeCO_3G .

2.5. Get shovels and OUPs distance

The distance between all shovels and OUPs is obtained through the truck dispatching system interface of the open-pit mine. Where D_{ij} is the distance from the number i shovel to the number j OUP.

2.6. Construct linear programming mathematical model for ore blending

Assuming that x_{ij} is the amount of ore transported from the number i blasting area to the number j OUP, the objectives and constraints of the MSMT ore blending linear programming mathematical model of open-pit iron ore include:

- Target of maximum OO and shortest haul distance:

$$\max f_1(x) = \sum_{i=1}^n \sum_{j=1}^m \frac{x_{ij}}{D_{ij}} \quad (1)$$

- Mineable quantity constraint of blasting area:

$$\sum_{j=1}^m x_{ij} \leq Q_i \quad (2)$$

- Shovel capacity constraint:

$$SMIN_i \leq \sum_{j=1}^m x_{ij} \leq SMAX_i \quad (3)$$

- OO requirements of OUP:

$$UMIN_j \leq \sum_{i=1}^n x_{ij} \leq UMAX_j \quad (4)$$

- WI constraint of mining at OUP:

$$PPMIN_j \leq \frac{\sum_{i=1}^n x_{ij} \cdot GP_i}{\sum_{i=1}^n x_{ij}} \leq PPMAX_j \quad (5)$$

- TFeG constraint produced at OUP:

$$PTMIN_j \leq \frac{\sum_{i=1}^n x_{ij} \cdot GT_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^n x_{ij}} \leq PTMAX_j \quad (6)$$

- FFeG constraint produced at OUP:

$$PFMIN_j \leq \frac{\sum_{i=1}^n x_{ij} \cdot GF_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^n x_{ij}} \leq PFMAX_j \quad (7)$$

- FeCO_3G constraint produced at OUP:

$$PCMIN_j \leq \frac{\sum_{i=1}^n x_{ij} \cdot GC_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^n x_{ij}} \leq PCMAX_j \quad (8)$$

2.7. Solving the mathematical model of linear programming for ore blending

The reasonable and feasible ore matching scheme is obtained, and the ore matching scheme is the output to the truck dispatching system interface of the open-pit mine.

3. Results and Discussion

Qidashan Iron Mine (QDSIM) is a metallurgical mine that integrates mining and beneficiation. It supplies iron ore to both Qidashan and Diaojuntai concentrators, with an annual design production capacity of 51 million tons of mining and stripping, 14.4 million tons of raw ore processing, 4.8 million tons of iron concentrate and a concentrate grade of more than 67.5%. The current ore blending method of QDSIM is completed manually by ore blending personnel using Excel. The operation is complex, requires high experience of ore blending personnel, has too many human factors, and has certain blindness, which leads to the inaccuracy of the ore blending scheme.

Assuming that there are 7 electric shovels in a certain shift of QDSIM one day, the ore is planned to be discharged to 2 OUPs. In order to obtain the ore blending scheme, do the following steps:

- (1) Select 7 electric shovels, namely 1#, 10#, 11#, 15#, 17#, 21# and 22# respectively, and 2 OUPs for ore blending, namely North Crushing Station (NCS) and Ore Crushing Station (OCS). NCS's ore is transported to Qidashan concentrator and OCS's ore is transported to Diaojuntai concentrator.
- (2) Obtain the geological data of the blasting area where the electric shovel is located. Through the three-dimensional geological software interface, according to the electric shovel specified by the user, the recoverable quantities of the blasting area are all 20000t, the WI are 59.71, 47.66, 63.50, 58.50, 57.60, 67.90 and 63.56 respectively, and the geological TFeG are 30.35%, 30.66%, 30.60%, 31.67%, 29.12%, 31.21% and 30.85% respectively, the geological FFeG is 11.39%, 13.15%, 12.74%, 12.56%, 10.76%, 12.36% and 10.54% respectively, the FeCO_3G of 15# shovel is 4%, and the others are 0%. Detailed data are shown in Table 1.
- (3) The OD of the specified blasting area is input by the user, as shown in Table 1, which are 2%, 2%, 0%, 1%, 0%, 1% and 1%, respectively. The recoverable quantity of the shovel is all 20000t. The LL and UL of OO are 500t ~ 2500t, 500t ~ 3000t, 500t ~ 3000t, 500t ~ 3000t, 500t ~ 3000t, 500t ~ 2000t, and 500t ~ 2000t, respectively.
- (4) The user inputs the OO range within the ore blending time period of each OUP, as shown in Table 2, which are 1t ~ 18000t and 1t ~ 7000t, respectively. The mining WI range is all 28 ~ 70, the TFeG range is all 28.00 ~ 34.00, the FFeG range is all 6.00 ~ 13.00, and the FeCO_3G range is all 0.00 ~ 6.00.
- (5) The distance between all electric shovels and the OUPs is obtained through the interface of the truck dispatching system of the open-pit mine. As shown in Table 3, the distances between the seven selected shovels and OCS are 2000m, 1500m, 1800m, 2500m, 500m, 900m and 800m, respectively. The distances between the seven selected shovels and NCS are 400m, 200m, 300m, 1000m, 1500m, 1300m and 1600m, respectively.

TABLE 1

Data and parameter setting of explosion area

Shovel No.	Recoverable quantity (t)	Geological WI	Geological TFeG (%)	Geological FFeG (%)	Geological FeCO ₃ G (%)	OD (%)	OO LL (t)	OO UL (t)
1#	20000	59.71	30.35	11.39	0.00	2	500	2500
10#	20000	47.66	30.66	13.15	0.00	2	500	3000
11#	20000	63.50	30.60	12.74	0.00	0	500	3000
15#	20000	58.50	31.67	12.56	4.00	1	500	3000
17#	20000	57.60	29.12	10.76	0.00	0	500	3000
21#	20000	67.90	31.21	12.36	0.00	1	500	2000
22#	20000	63.56	30.85	10.54	0.00	1	500	2000

TABLE 2

OUP parameter setting

No.	OUP	OO (t)		WI		TFeG (%)		FFeG (%)		FeCO ₃ G (%)	
		LL	UL	LL	UL	LL	UL	LL	UL	LL	UL
1	OCS	1	18000	28.00	70.00	28.00	34.00	6.00	13.00	0.00	6.00
2	NCS	1	7000	28.00	70.00	28.00	34.00	6.00	13.00	0.00	6.00

TABLE 3

Distance between shovel and OUP

Shovel No.	Distance from OCS (m)	Distance from NCS (m)
1#	2000	400
10#	1500	200
11#	1800	300
15#	2500	1000
17#	500	1500
21#	900	1300
22#	800	1600

(6) The linear programming mathematical model of MSMT ore blending in open-pit iron mine can be expressed in the following forms:

$$\max \left(\begin{aligned} &\frac{x_{11}}{2000} + \frac{x_{12}}{400} + \frac{x_{21}}{1500} + \frac{x_{22}}{200} + \frac{x_{31}}{1800} + \frac{x_{32}}{300} + \frac{x_{41}}{2500} + \\ &+ \frac{x_{42}}{1000} + \frac{x_{51}}{500} + \frac{x_{52}}{1500} + \frac{x_{61}}{900} + \frac{x_{62}}{1300} + \frac{x_{71}}{800} + \frac{x_{72}}{1600} \end{aligned} \right) \quad (9)$$

$$\begin{cases} x_{11} + x_{12} \leq 20000 \\ x_{21} + x_{22} \leq 20000 \\ x_{31} + x_{32} \leq 20000 \\ x_{41} + x_{42} \leq 20000 \end{cases} \quad (10)$$

$$\begin{array}{l}
x_{51} + x_{52} \leq 20000 \\
x_{61} + x_{62} \leq 20000 \\
x_{71} + x_{72} \leq 20000 \\
500 \leq x_{11} + x_{12} \leq 2500 \\
500 \leq x_{21} + x_{22} \leq 3000 \\
500 \leq x_{31} + x_{32} \leq 3000 \\
500 \leq x_{41} + x_{42} \leq 3000 \\
500 \leq x_{51} + x_{52} \leq 3000 \\
500 \leq x_{61} + x_{62} \leq 2000 \\
500 \leq x_{71} + x_{72} \leq 2000 \\
1 \leq \sum_{i=1}^7 x_{i1} \leq 18000 \\
1 \leq \sum_{i=1}^7 x_{i2} \leq 7000 \\
28 \leq \frac{\sum_{i=1}^7 x_{i1} \cdot GP_i}{\sum_{i=1}^7 x_{i1}} \leq 70 \\
S.T. \left\{ \begin{array}{l}
28 \leq \frac{\sum_{i=1}^7 x_{i2} \cdot GP_i}{\sum_{i=1}^7 x_{i2}} \leq 70 \\
28 \leq \frac{\sum_{i=1}^7 x_{i1} \cdot GT_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^7 x_{i1}} \leq 34 \\
28 \leq \frac{\sum_{i=1}^7 x_{i2} \cdot GT_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^7 x_{i2}} \leq 34 \\
6 \leq \frac{\sum_{i=1}^7 x_{i1} \cdot GF_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^7 x_{i1}} \leq 13 \\
6 \leq \frac{\sum_{i=1}^7 x_{i2} \cdot GF_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^7 x_{i2}} \leq 13 \\
0 \leq \frac{\sum_{i=1}^7 x_{i1} \cdot GC_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^7 x_{i1}} \leq 6 \\
0 \leq \frac{\sum_{i=1}^7 x_{i2} \cdot GC_i \cdot \left(1 - \frac{R_i}{100}\right)}{\sum_{i=1}^7 x_{i2}} \leq 6
\end{array} \right. \quad (10 \text{ continued})
\end{array}$$

Where

$$\sum_{i=1}^7 x_{i1} = x_{11} + x_{21} + x_{31} + x_{41} + x_{51} + x_{61} + x_{71} \quad (11)$$

$$\sum_{i=1}^7 x_{i2} = x_{12} + x_{22} + x_{32} + x_{42} + x_{52} + x_{62} + x_{72} \quad (12)$$

$$\begin{aligned} \sum_{i=1}^7 x_{i1} \cdot GP_i &= x_{11} \times 59.71 + x_{21} \times 47.66 + x_{31} \times 63.5 + \\ &+ x_{41} \times 58.5 + x_{51} \times 57.6 + x_{61} \times 67.9 + x_{71} \times 63.56 \end{aligned} \quad (13)$$

$$\begin{aligned} \sum_{i=1}^7 x_{i2} \cdot GP_i &= x_{12} \times 59.71 + x_{22} \times 47.66 + x_{32} \times 63.5 + \\ &+ x_{42} \times 58.5 + x_{52} \times 57.6 + x_{62} \times 67.9 + x_{72} \times 63.56 \end{aligned} \quad (14)$$

$$\begin{aligned} \sum_{i=1}^7 x_{i1} \cdot GT_i \cdot \left(1 - \frac{R_i}{100}\right) &= x_{11} \times 30.35 \times \left(1 - \frac{2}{100}\right) + x_{21} \times 30.66 \times \left(1 - \frac{2}{100}\right) + \\ &+ x_{31} \times 30.6 + x_{41} \times 31.67 \times \left(1 - \frac{1}{100}\right) + x_{51} \times 29.12 + \\ &+ x_{61} \times 31.21 \times \left(1 - \frac{1}{100}\right) + x_{71} \times 30.85 \times \left(1 - \frac{1}{100}\right) \end{aligned} \quad (15)$$

$$\begin{aligned} \sum_{i=1}^7 x_{i2} \cdot GT_i \cdot \left(1 - \frac{R_i}{100}\right) &= x_{12} \times 30.35 \times \left(1 - \frac{2}{100}\right) + x_{22} \times 30.66 \times \left(1 - \frac{2}{100}\right) + \\ &+ x_{32} \times 30.6 + x_{42} \times 31.67 \times \left(1 - \frac{1}{100}\right) + x_{52} \times 29.12 + \\ &+ x_{62} \times 31.21 \times \left(1 - \frac{1}{100}\right) + x_{72} \times 30.85 \times \left(1 - \frac{1}{100}\right) \end{aligned} \quad (16)$$

$$\begin{aligned} \sum_{i=1}^7 x_{i1} \cdot GF_i \cdot \left(1 - \frac{R_i}{100}\right) &= x_{11} \times 11.39 \times \left(1 - \frac{2}{100}\right) + x_{21} \times 13.15 \times \left(1 - \frac{2}{100}\right) + \\ &+ x_{31} \times 12.74 + x_{41} \times 12.56 \times \left(1 - \frac{1}{100}\right) + x_{51} \times 10.76 + \\ &+ x_{61} \times 12.36 \times \left(1 - \frac{1}{100}\right) + x_{71} \times 10.54 \times \left(1 - \frac{1}{100}\right) \end{aligned} \quad (17)$$

$$\begin{aligned}
\sum_{i=1}^7 x_{i2} \cdot GF_i \cdot \left(1 - \frac{R_i}{100}\right) &= x_{12} \times 11.39 \times \left(1 - \frac{2}{100}\right) + x_{22} \times 13.15 \times \left(1 - \frac{2}{100}\right) + \\
&+ x_{32} \times 12.74 + x_{42} \times 12.56 \times \left(1 - \frac{1}{100}\right) + x_{52} \times 10.76 + \\
&+ x_{62} \times 12.36 \times \left(1 - \frac{1}{100}\right) + x_{72} \times 10.54 \times \left(1 - \frac{1}{100}\right)
\end{aligned} \quad (18)$$

$$\sum_{i=1}^7 x_{i1} \cdot GC_i \cdot \left(1 - \frac{R_i}{100}\right) = x_{41} \times 4 \times \left(1 - \frac{1}{100}\right) \quad (19)$$

$$\sum_{i=1}^7 x_{i2} \cdot GC_i \cdot \left(1 - \frac{R_i}{100}\right) = x_{42} \times 4 \times \left(1 - \frac{1}{100}\right) \quad (20)$$

TABLE 4

Shovel ore blending results

Shovel No.	OCS ore blending ratio (%)	NCS ore blending ratio (%)
1#	21.74	14.29
10#	26.09	42.86
11#	0.00	42.86
15#	17.39	0.00
17#	0.00	0.00
21#	17.39	0.00
22#	17.39	0.00

- (7) The MSMT ore blending linear programming mathematical model ((9)~(20)) of an open-pit iron mine is solved to obtain the ore blending results of the electric shovel as shown in Table 4. The ore blending results of OUP are shown in Table 5, and the ore blending operation results as shown in Table 6. The ore blending results of electric shovels list the ore transportation proportion from each electric shovel to each OUP. The specific data is that the proportion of seven electric shovels to OCS is 21.74%, 26.09%, 0%, 17.39%, 0%, 17.39% and 17.39% respectively, and the proportion to NCS is 14.29%, 41.86%, 42.86% and others is 0% respectively. The ore blending results of OUPs list the WI, TFeG, FFeG and FeCO₃G predicted for each OUP if they are produced according to the ore blending results of the electric shovel. The predicted results of OCS are 58.45, 30.44, 11.89 and 0.69, respectively, and the predicted results of NCS are 60.26, 30.07, 11.85 and 0.57, respectively. According to the conclusion of Su et al. [31], when the WI is 58.45 and the comprehensive concentrate iron grade is 67.5%. It can be predicted that the comprehensive tailings iron grade is between 10.5% and 11.5%, the beneficiation ratio is between 3.26 and 3.39, and the cost per ton of concentrate is 511 yuan. When the WI is 60.26, and the comprehensive concentrate iron grade is 67.5%, it can be predicted that the comprehensive tailings iron grade is between 9.5% and 10.5%, the beneficiation ratio is between 3.14 and 3.26, and the cost per ton of concentrate is 447 yuan. Send the shovel ore blending results to the truck dispatching system of the open pit mine, and the truck dispatching system of the open pit mine will organise production.

TABLE 5

OUP ore blending results

No.	OUP	WI	TFeG (%)	FFeG (%)	FeCO ₃ G (%)
1	OCS	58.45	30.44	11.89	0.69
2	NCS	60.26	30.07	11.85	0.57

Through the ore blending calculation results, it can be seen that the production bottleneck under the current conditions is where the limit value is reached. From this embodiment, it can be seen that the production capacity of shovels is the production bottleneck, and the output of NCS is also the production bottleneck.

TABLE 6

Ore blending operation results

Content	Setting value	Ore blending result	Status (limit value reached or not)	Difference
Shovel 1# mining volume	500-2500	2500	Reached	0
Shovel 10# mining volume	500-3000	3000	Reached	0
Shovel 11# mining volume	500-3000	3000	Reached	0
Shovel 15# mining volume	500-3000	3000	Reached	0
Shovel 17# mining volume	500-3000	3000	Reached	0
Shovel 21# mining volume	500-2000	2000	Reached	0
Shovel 22# mining volume	500-2000	2000	Reached	0
OCS output	1-18000	11500	Not reached	6500
NCS output	1-7000	7000	Reached	0

4. Conclusions

In this paper, an MSMT ore blending method for open-pit iron ore is proposed. The MSMT ore blending optimisation of open-pit iron ore is realised by establishing the ore blending model with the goal of maximum OO and shortest transportation distance, and the ore WI, TFeG, FFeG and FeCO₃G after ore blending meets the requirements. Based on the above algorithm, the ore blending optimisation system was developed. It has been applied in QDSIM and achieved good application results. Through the application of the present system, the increase in ore production is achieved while the stabilisation of ore inclusion indicators in downstream concentrators is guaranteed.

In the current intelligent mine construction and even the future unmanned mine construction, the intelligent ore distribution system combines the intelligent truck dispatching system and driverless technology to lay the foundation for the realisation of the unmanned mine. In the future, the mine staff can complete the mining of the whole open-pit mine only in the remote control centre.

In the actual open-pit production, the production situation changes at any time, such as the failure of production equipment, the large fluctuation of ore grade, etc. At this point, if the production is carried out according to the previously generated ore blending plan, there will be a substantial deviation, which is contrary to the original intention of ore blending. This requires

that the ore blending plan can be automatically adjusted during production, and the adjusted ore blending plan will be sent to the truck dispatching system. In this way, the deviation can be corrected in time to avoid significant errors. The next step is to carry out dynamic ore blending based on this study.

List of abbreviations

ABC	artificial bee swarm	OO	ore output
BP	back propagation	OUP	ore unloading point
DE	differential evolution	PSO	particle swarm optimization
FeCO ₃ G	iron carbonate content	QDSIM	Qidashan iron mine
FFeG	ferrous iron grade	RBF	radial basis function
LL	lower limit	SIP	stochastic integer programming
MSMT	multi-source and multi-target	TFeG	total iron grade
NCS	north crushing station	UL	upper limit
OCS	ore crushing station	WI	washability index
OD	ore dilution	WNN	wavelet neural network
OG	ore grade		

References

- [1] A. Lamghari, R. Dimitrakopoulos, A diversified Tabu search approach for the open-pit mine production scheduling problem with metal uncertainty. *Eur. J. Oper. Res.* **222** (3), 642-652 (2012). DOI: <https://doi.org/10.1016/j.ejor.2012.05.029>
- [2] F.R.A. Consuegra, R. Dimitrakopoulos, Algorithmic approach to pushback design based on stochastic programming: method, application and comparisons. *Mining Technology* **119** (2), 88-101 (2010). DOI: <https://doi.org/10.1179/037178410X12780655704761>
- [3] S. Ramazan, R. Dimitrakopoulos, Production scheduling with uncertain supply: a new solution to the open pit mining problem. *Optim. Eng.* **14** (2), 361-380 (2013). DOI: <https://doi.org/10.1007/s11081-012-9186-2>
- [4] J. Benndorf, R. Dimitrakopoulos, Stochastic long-term production scheduling of iron ore deposits: Integrating joint multi-element geological uncertainty. *J. Min. Sci.* **49** (1), 68-81 (2013). DOI: <https://doi.org/10.1134/S1062739149010097>
- [5] A. Leite, R. Dimitrakopoulos, Stochastic optimisation model for open pit mine planning: Application and risk analysis at copper deposit. *Min. Technol.* **116** (3), 109-118 (2007). DOI: <https://doi.org/10.1179/174328607X228848>
- [6] R.C. Goodfellow, R. Dimitrakopoulos, Global optimization of open pit mining complexes with uncertainty. *Appl. Soft Comput.* **40**, 292-304 (2016). DOI: <https://doi.org/10.1016/j.asoc.2015.11.038>
- [7] W.S. Liu, F.P. Li, Iron Ore Blending Based on Linear Programming. *Applied Mechanics and Materials* **443** (443-443), 657-661 (2013). DOI: <https://doi.org/10.4028/www.scientific.net/AMM.443.657>
- [8] W.B. Lambert, A.M. Newman, Tailored Lagrangian Relaxation for the open pit block sequencing problem. *Ann. Oper. Res.* **222** (1), 419-438 (2014). DOI: <https://doi.org/10.1007/s10479-012-1287-y>
- [9] N. Boland, I. Dumitrescu, G. Froyland, A.M. Gleixner, LP-based disaggregation approaches to solving the open pit mining production scheduling problem with block processing selectivity. *Comput. Oper. Res.* **36** (4), 1064-1089 (2007). DOI: <https://doi.org/10.1016/j.cor.2007.12.006>
- [10] E. Moreno, M. Rezakhah, A. Newman, F. Ferreira, Linear models for stockpiling in open-pit mine production scheduling problems. *European Journal of Operational Research.* **260** (1), 212-221 (2016). DOI: <https://doi.org/10.1016/j.ejor.2016.12.014>

- [11] R. Goodfellow, R. Dimitrakopoulos, Algorithmic integration of geological uncertainty in pushback designs for complex multiprocess open pit mines. *Min. Technol.* **122** (2), 67-77 (2013). DOI: <https://doi.org/10.1179/147490013X13639459465736>
- [12] J.A. Ferland, J. Amaya, M.S. Djuimo, Application of a Particle Swarm Algorithm to the Capacitated Open Pit Mining Problem, Springer Berlin Heidelberg (2007).
- [13] M.S. Shishvan, J. Sattarvand, Long term production planning of open pit mines by ant colony optimization. *Eur. J. Oper. Res.* **240** (3), 825-836 (2015). DOI: <https://doi.org/10.1016/j.ejor.2014.07.040>
- [14] M. Kumral, Optimizing ore-waste discrimination and block sequencing through simulated annealing. *Appl. Soft Comput.* **13** (8), 3737-3744 (2013). DOI: <https://doi.org/10.1016/j.asoc.2013.03.005>
- [15] A. Khan, C. Niemann-Delius, Production Scheduling of Open Pit Mines Using Particle Swarm Optimization Algorithm. *Adv. Oper. Res.* **2014**, 1-9 (2014). DOI: <https://doi.org/10.1155/2014/208502>
- [16] L. Montiel, R. Dimitrakopoulos, Stochastic mine production scheduling with multiple processes: Application at Escondida Norte. Chile. *J. Min. Sci.* **49** (4), 583-597 (2013). DOI: <https://doi.org/10.1134/S1062739149040096>
- [17] E. Jélvez, N. Morales, P. Nancel-Penard, J. Peypouquet, P. Reyes, Aggregation heuristic for the open-pit block scheduling problem. *European Journal of Operational Research.* **249** (3), 1169-1177 (2016). DOI: <https://doi.org/10.1016/j.ejor.2015.10.044>
- [18] M. Soleymani Shishvan, J. Sattarvand, Long term production planning of open pit mines by ant colony optimization. *European Journal of Operational Research.* **240** (3), 825-836 (2015). DOI: <https://doi.org/10.1016/j.ejor.2014.07.040>
- [19] S.O. Gilani, J. Sattarvand, Integrating geological uncertainty in long-term open pit mine production planning by ant colony optimization. *Computers & Geosciences.* **87**, 31-40 (2016). DOI: <https://doi.org/10.1016/j.cageo.2015.11.008>
- [20] D. Karaboga, B. Basturk, A powerful and efficient algorithm for numerical function optimization: Artificial bee colony (ABC) algorithm. *J. Glob. Optim.* **39** (3), 459-471 (2007). DOI: <https://doi.org/10.1007/s10898-007-9149-x>
- [21] D. Karaboga, B. Akay, A survey: Algorithms simulating bee swarm intelligence. *Artif. Intell. Rev.* **31** (1-4), 61-85 (2009). DOI: <https://doi.org/10.1007/s10462-009-9127-4>
- [22] B. Li, Research on WNN Modeling for Gold Price Forecasting Based on Improved Artificial Bee Colony Algorithm. *Comput. Intel. Neurosci.* **2014**, 1-10 (2014). DOI: <https://doi.org/10.1155/2014/270658>
- [23] B. Jafarsteh, N. Fathianpour, A hybrid simultaneous perturbation artificial bee colony and back-propagation algorithm for training a local linear radial basis neural network on ore grade estimation. *Neurocomputing.* **235**, 217-227 (2017). DOI: <https://doi.org/10.1016/j.neucom.2017.01.016>
- [24] C. Chen, Y. Tsai, R. Jhang, Approximation of the Piecewise Function Using Neural Fuzzy Networks with an Improved Artificial Bee Colony Algorithm. *J. Autom. Control Eng.* **3** (6), 503-506 (2015). DOI: <http://dx.doi.org/10.12720/joace.3.6.503-506>
- [25] S. Anuar, A. Selamat, R. Sallehuddin, Hybrid Artificial Neural Network with Artificial Bee Colony Algorithm for Crime Classification. In: Phon-Amnuaisuk, S., Au, T. (eds) *Computational Intelligence in Information Systems. Advances in Intelligent Systems and Computing.* **331**, 31-40 (2015). DOI: https://doi.org/10.1007/978-3-319-13153-5_4
- [26] W.A.H.M. Ghanem, A. Jantan, Swarm intelligence and neural network for data classification. 2014 IEEE International Conference on Control System. Computing and Engineering (ICCSCE 2014). 196-201 (2014). DOI: <https://doi.org/10.1109/ICCSCE.2014.7072714>
- [27] L. Cui, K. Zhang, G. Li, X. Wang, S. Yang, Z. Ming, J.Z. Huang, N. Lu, A smart artificial bee colony algorithm with distance-fitness-based neighbor search and its application. *Future Gener. Comput. Syst.* **89**, 478-493 (2018). DOI: <https://doi.org/10.1016/j.future.2018.06.054>
- [28] A. Tosun, Determination of Optimum Truck Number at Open Coal Quarry. *Archives of Mining Sciences* **66** (2), 213-225 (2021). DOI: <https://doi.org/10.24425/ams.2021.137458>
- [29] F.M. Gema, M.L.R. Julio, P.G. Raul, M.P. Beatriz, P.A. Ruben, Multicriteria Analysis for the Determination of the Exploitability Index of Industrial Aggregate Outcrops. *Archives of Mining Sciences* **65** (1), 103-115 (2020). DOI: <https://doi.org/10.24425/ams.2020.132709>
- [30] E. Van Tonder, D.A. Deglon, T.J. Napier-Munn, The effect of ore blends on the mineral processing of platinum ores. *Min. Eng.* **23** (8), 621-626 (2010). DOI: <https://doi.org/10.1016/j.mineng.2010.02.008>
- [31] X.G. Su, X.Y. Chen, C. Liu, F. Yu, C.Y. Xu, P Index Model of Comprehensive Evaluation of Iron Ore Washability. *Modern Mining* **33** (03), 137-140+144 (2017).