

## NEURAL CLASSIFIERS IN RECOGNIZING OF THE TOOTH CONTACT OF SPIRAL AND HYPOID GLEASON BEVEL GEARS

Piotr Skawinski

### Summary

The special computer system KONTEPS for calculation of spiral and hypoid bevel gears generally supports technology for the conventional and CNC machines (milling machines). In this system environment, the special computer application generates solid or surface models of gears by cutting simulation. Other computer application, based on Matlab functions and methods of artificial intelligence, supports the tooth contact development. The special classifiers which allow to recognize the tooth contact, select the first, second and third order of changes and support the technologist in a manufacturing process. This paper describes computerized integration of design and manufacturing of the spiral and hypoid bevel gear, supported by the artificial intelligence.

**Keywords.** Neural network, bevel gears, tooth contact

### Klasyfikatory neuronowe w rozpoznawaniu śladów współpracy zębów przekładni stożkowych i hipoidalnych o kołowo-lukowej linii zęba

#### Streszczenie

Komputerowy system obliczeń konstrukcyjno-technologicznych KONTEPS przekładni stożkowych i hipoidalnych generuje technologiczne wielkości ustawcze maszyn nacinających uzębienie (frezarek) konwencjonalnych i sterowanych numerycznie. W środowisku systemu symulacji obróbki jego specjalistyczna aplikacja generuje modele bryłowe koła i zębniaka. Ułatwia proces lokalizacji śladu współpracy kontynuowany w rzeczywistych warunkach obróbki uzębienia. Współpracująca z systemem dodatkowa aplikacja wykorzystująca funkcje programu Matlab i klasyfikatory neuronowe rozpoznaje ślad współpracy zęba na maszynie kontrolnej. Wspiera więc technologa, proponując wprowadzanie poprawek I, II i III rzędu do ustawień technologicznych maszyny. W pracy przedstawiono przykład komputerowej integracji projektowania i wytwarzania przekładni stożkowych wspomaganą przez aplikację z obszaru sztucznej inteligencji.

**Słowa kluczowe:** sieci neuronowe, przekładnie stożkowe, ślad współpracy

## 1. Introduction

---

Address: Piotr SKAWINSKI, PhD. Eng., Warsaw University of Technology, Faculty of Automotive and Construction Machinery Engineering, 02-524 Warsaw, Narbutta 84, psk@simr.pw.edu.pl

The tooth contact analyses is one of the important elements during development process of the spiral and hypoid bevel gears. The size, orientation and shape are the main features of the tooth contact [1-10]. This analysis can be done in CAD environment when CAD system is used to generate solid models of gears by the cutting simulation [7, 8] or by numerical methods supported by the Litvin theory [2, 3]. In each case there are the theoretical solutions in computer environment without any errors which exist during cutting on the milling machines as kinematic errors of the machine, setup errors, fixture errors, blank errors, cutter errors etc. These factors are the reasons that the tooth contact of the cutting gears is different than the theoretical approach. In order to correct the tooth contact, the first, second and third order of changes are introduced. The first order of changes (proportional changes) is used during cutting by a technologist in the machine setup without special calculations, based on practical recommendations and experiences only, obviously supported on the theory of gears. The second order of changes is used when the first order changes are not effective.

Third order of changes requires the new geometrical and technological calculations. It means, that they will have new geometrical dimensions of gears which are slightly different from the previous geometry such as tooth proportions, addendum and dedendum angle, pressure angle, etc. In this case the gears follow the same procedure in a development process: the first, second and third order changes. Steering of tooth contact requires depth knowledge and experience about the spiral bevel gears. Tooth contact development and identification of tooth bearing can be transferred to artificial intelligence area supported by a neural network. Observed tooth contact on the testing machine by digital cameras (Fig. 1) is saved in \*.bmp standard or \*.jpeg standard. Testing machine it is typical machine as example G513, in which the digital cameras have been mounted. Each camera observes during testing (gears rotate under slightly load) one flank of tooth, it means convex and concave side of tooth. The bmp or jpeg files are saved in the computer and they are analyzed by special Matlab application, which it is call classifier. The tooth contact picture is analyzed by a special program and after its identification ascribed to the proper classes. The practice of tooth contact development allows to differentiate thirteen classes, which are connected with size, shape and position of the tooth contact. Ascribing the tooth contact to the proper 13 classes (Table 1) means activation of a suitable correction procedure, which gives proper changes in pinion machine setup. This program is an external program which reside on the PC computer and most often use the Matlab environment.

An observed by the digital camera the tooth contact is not a homogeneous area as a texture and it has not well-defined border lines. This is because the tooth surface is rather as free form surface and consists of the ellipses of temporary contacts. Besides, the tooth surface is the result of generation movement of the cutting edges. In each normal section along the tooth, a profile

consists of micro-segments, which sizes depend on the feed rate velocity. Pictures of tooth contact which are observed by digital camera are shown in Fig. 2a (correct tooth contact) and Fig. 2b (too short tooth contact). In both cases it is very difficult to determine precisely the limits (borders) of area of tooth contact, hence in Table 1 the samples of the tooth contact do not have well-defined line which delimit the area of the mismatch.

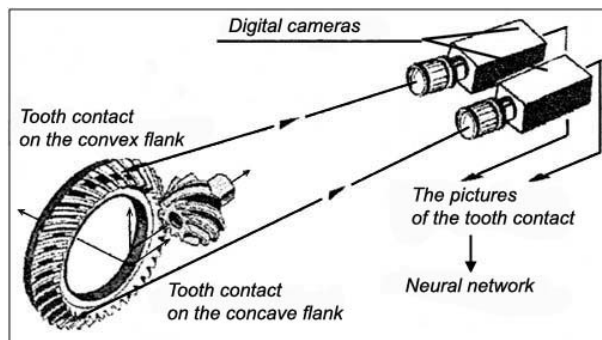


Fig. 1. An idea of the tooth contact recognition

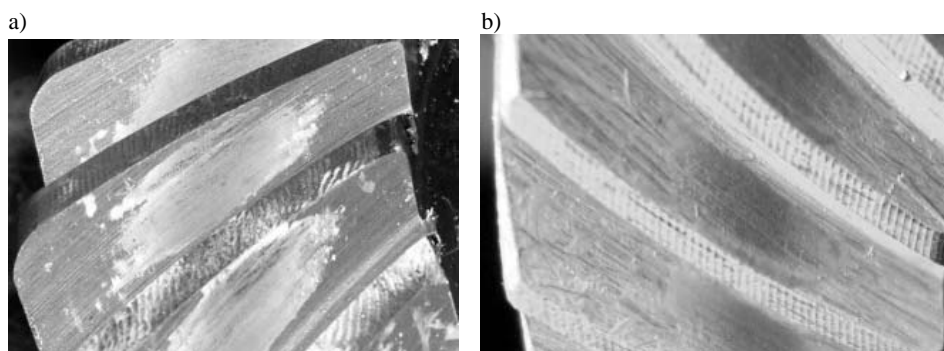


Fig. 2. Observed by the digital camera tooth contact: correct tooth contact (a), to short tooth contact (b)

## 2. The features of the tooth contact

Classification to the proper classes depends on the features of tooth bearing. The analysis of the features of tooth bearing has been done in Matlab environment. A special procedure “features.m” based on function “regionprops” allows to determine the features of tooth bearing. For the Matlab function “regionprops” thirteen (13) features has been chosen. Some of the features are as vectors and therefore in this way the number of features of tooth bearings

increases to seventeen (17). The features “Centroid” and “BoundingBox” have together six constituents. In the result, it is examining seventeen (17) features which will identify the tooth bearing. These features are mentioned below as the vector’s value and the scalar value:














- Area – scalar – the number of pixel in investigated tooth bearing;
- BoundingBox1,2,3,4 – vectors – the smallest polygon included investigated tooth contact;
- ConvexArea – number of pixels in ConvexImage;
- Perimeter – the length in pixels of perimeter of tooth bearing;
- Centroid1,2 – vectors, the center of mass of the region;
- MajorAxisLength – scalar – the length in pixels of major axis of ellipse;
- MinorAxisLength – scalar – the length in pixels of minor axis of ellipse;
- Orientation – scalar – the angle between major axis of ellipse and horizontal axis;
- EquivDiameter – diameter of circle which includes the same numbers of pixels as the investigated bearing;
- Solidity – scalar – the relationship between number of pixels in Area to the total number of pixels;
- Eccentricity – scalar – relationship between the distance of ellipse centers (in pixels) to the major axis length (in pixels);
- Extent – scalar – relationship number of pixels in tooth contact to number of pixels limited by BoundingBox;
- FilledArea – scalar – number of pixels in tooth contact limited by BoundingBox.

### 3. The classifiers of the tooth contact recognition

Approximately two hundred nine (209) different pictures of the tooth contact which belong to thirteen (13) classes (Table 1) have been prepared in order to learn about the neural network. In the initial phases of this experiment the SVM Classifier of Matlab environment has been used. Based on the analysis of many tooth contacts including comparisons of their features, it has been noticed, that some of the features have very close values, for example: the correct or wide tooth contact had similar number of pixels as the toe or heel bearing. During the analysis of many tests for the correlation coefficient equal  $c = 1$  it was noticed, that the 2-dimensional set (feature/feature) is very strongly correlated with other several features, for example: the feature number # 12 with # 13 and # 14 and also # 13 with # 14. It means, that the features may have similar value and that the tooth contact may be ascribed to the different classes. The correlation factor “c” was decreased to  $c=0.95$  and analysis of the features has been done again. The result of analysis is that the features number

# 5 (BoundingBox) and # 13 (Perimeter) are strongly correlated. It is

Table 1. Classes of tooth contact

Type of tooth bearing	Tooth bearing	
	toe	heel
Correct bearing		
Bias in		
Bias out		
Short bearing		
Long bearing		
Wide bearing		
Narrow bearing		
Toe bearing		
Heel bearing		
High bearing		
Low bearing		
Diamond bearing I		
Diamond bearing II		

possible to start the next analysis in which the arrangement of vectors in observation space is studied. The arrangement vectors, these are the vectors describing the layout of classes in a function of chosen features. To make such analysis easier and to determine the direction of further studies, it is enough to take 2 features (2-dimensional coordinates) but the complete analysis include in this case the 13-dimensional space. Selection of the features of n-dimensional

observation space based on evaluation of the features or group of the features leads to finding subset of the M-futures, it is m –dimensional subspace. The subset of the M-features must be subspace which optimize criteria of the classes separation. Therefore, it means evaluation of the classes separation based on two criteria: Criterion of Average Scatters (CAS) and Criterion of the Number of Prototypes of classes (CNP). From the number  $2^N-1$  combinations of the observation subspace, using criteria CAS and CNP, the best subspace has been chosen: CAS = 0.361 and CNP = 151. This selected subset of the futures of 2-dimensional observation space is shown in the Fig. 3, it means that the features Centroid1 and BoundingBox3 decide in which class is the tooth contact. Running the next analyses for the next features is seen, that is no clear group of classes. There is (Fig. 3) dissipation and confusion of classes. It means, that it is very difficult to put down investigated tooth contact to one of the thirteen classes. The classes intermingle because for strongly correlated features of the tooth contact, classifier can not synonymously to put down the tooth contact to the proper class. Neural network can recognize usually two classes but in this task are 13 different tooth contacts (13 classes) with sometimes very similar features.

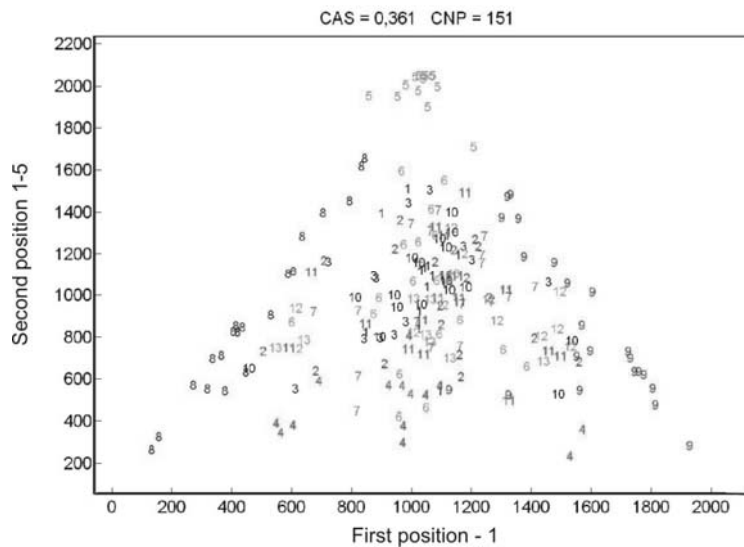


Fig. 3. Arrangement of the vectors in observation space for the feature 1 and 5 (Centroid1 and BoundingBox3)

#### 4. The NBV I classifier

This problem can be solved on the basis on k-classifiers, it means that a committee which consists k-classifiers should be prepared. Thus tooth contact recognition is the multiclass problem. Then it is necessary to build the submodels which will be the smaller groups of classes. The same set of 13 classes has been divided on five classes. As criterion of partition were taken prediction direction of the tooth contact movement, similar as technologist make a decision during tooth contact development introducing the I and II order changes. In the first class numbering all tooth contact are situated centrally and symmetrically with regard to the middle point of tooth surface. Therefore, in the first class are correct and not correct tooth contacts as bias in, bias out, wide, narrow, short and long. The first classifier should be recognized independently to the size and shape of bearing, all tooth contacts are in the middle of tooth ,toe bearing, heel bearing, low and high bearing. Studying correlation of the features for coefficient  $c = 1$  of all 17 features for less numbers of classes (5 classes) still a very strong correlation between ConvexArea, FilledArea and EquivDiameter have been noticed. Such strong correlation influences arrangement of vectors in the observation space where criteria CNP and CAS are not satisfied. Similarly as before this correlation of the features for coefficient  $c = 0.9$  and arrangement of subspace observation have been verified. The best subspace of the observation subspace where  $CAS = 0.65$  (Criterion of Average Scatters) and  $CNP = 34$  (Criterion of the Number of Prototypes) has been chosen. It means that features Centroid1 and Centroid2 decide in which class the tooth contact is located. An areas of the 5 classes have been shown by solid line (Fig. 4). Continuing such classification problem is necessary in order to define the next classifier which will recognize the next five classes. Second classifier should recognize: correct tooth contact (class 1), wide tooth contact (class 2), narrow tooth contact (class 3), short tooth contact (class 4) and long tooth contact (class 5).

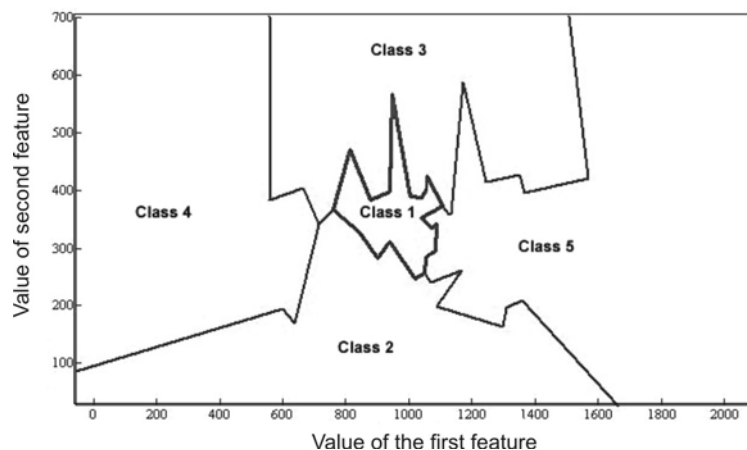


Fig. 4. An illustration of the I classifier for five classes

### 5. The NBV II classifier

This classifier will recognize tooth contacts which are in the central area of the tooth flank. Certainly, II NBV classifier is based on the same features as I NBV classifier. Taking the same correlation factor as before for the I NBV classifier ( $c = 0.9$ ), the observation subspaces criteria have been analyzed. Subspace has advantageous values:  $CAS = 0.762$  and  $CNP = 15$ . For this observation subspace and arrangement of vectors in the observation space and areas of classes has been made in the Fig. 5.

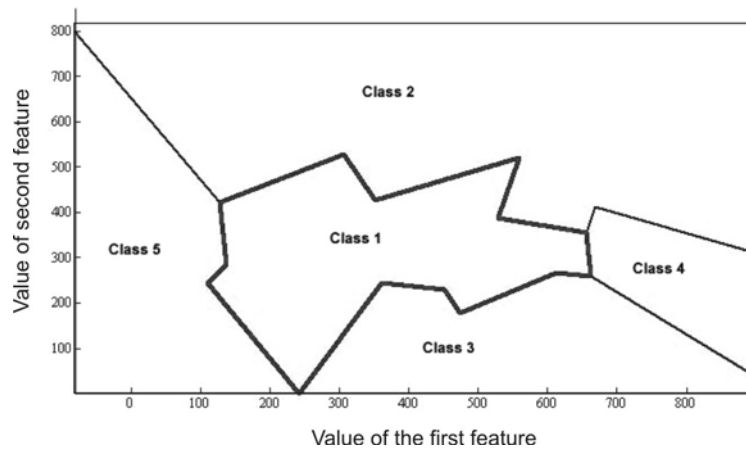


Fig. 5. An illustration of the II classifier for five classes

### 6. The NBV III classifier

Running classification problem is necessary in order to define the next classifier which will recognize next three classes. The next classifier number III NBV will recognize: correct tooth contact (class 1), bias in (class 2) and bias out (class 3). Activity of the third classifier focuses on the tooth contact which is in the middle of tooth flank, however it has correct length, width and bias out or bias in. The III classifier NBV analyse the same 17 features. The subspace has advantageous values according to CAS and CNP criteria:  $CAS = 1.39$  and  $CNP = 3$ . An arrangement of vectors in the observation space for the Third NBV classifier (3 classes) shows well-defined group of classes. The two dimensional



graph of the arrangement of vectors in the observation space for features Orientation and Extent illustrates clear divided areas of classes (Fig. 6).

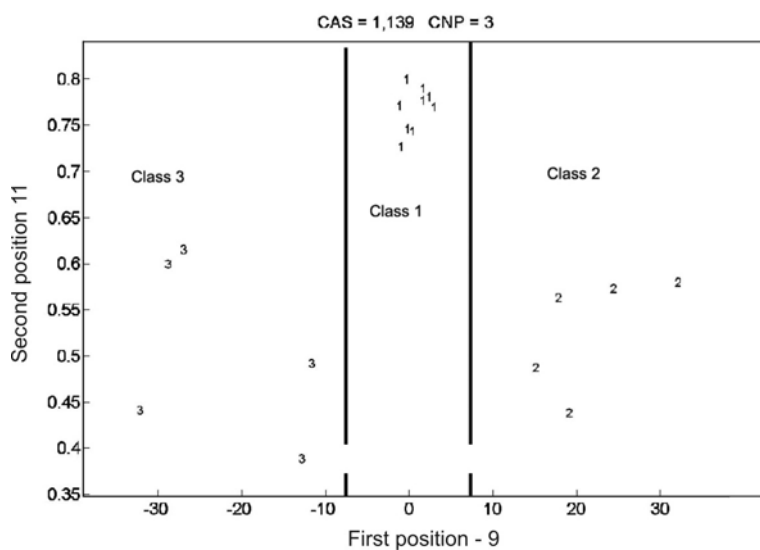


Fig. 6. An illustration of the III classifier for three classes

## 7. Conclusions

Verification of classifiers has been done accepting the same conditions as in production of the spiral bevel gears. Taking the tooth contact as a short and in the heel position, I NBV classifier identifies it according to the principle of recognizing to the fifth (5) classes. After applying of II order changes (increasing the eccentric angle and cradle angle) and cutting the pinion, the tooth contact was in the middle of tooth but moved down toward the dedendum. For this tooth contact the I order change has been used meaning the head setting was increased. After the final cutting, the tooth contact was in the middle of tooth and it had correct size and shape (ellipse). It means, that all three classifiers are correct and they satisfied requirements of the technologist.

## Acknowledgement

Financial support of Structural Funds in the Operational Programme – Innovative Economy (IE OP) financed from the European Regional Development Fund – Project No POIG.0101.02-00-015/08 is gratefully acknowledged.

### References

- [1] J. DYBALA: Wykrywanie wczesnych faz uszkodzeń metodami sztucznej inteligencji. ITE-PIB, Warszawa-Radom 2008.
- [2] F.L. LITVIN, A. FUENTES: Gear geometry and applied theory. Cambridge University Press, Cambridge 2004.
- [3] F.L. LITVIN: Development of gear technology and theory of gearing, NASA, Lewis Research Center 1999.
- [4] H.J. STADTFELD: Handbook of bevel and hypoid gears. RIT, New York 1993.
- [5] H.J. STADTFELD: Gleason bevel gear technology. Gleason Works, New York 1995.
- [6] Z. WÓJCIK: Przekładnie stożkowe. WNT, Warszawa 1984.
- [7] P. SKAWINSKI, W. JEDRZEJCZYK, P. SIEMINSKI: Application of CAD/CAM technology in designing and manufacturing of spiral bevel gears. Proc. XVI Inter. Conference FAIM2006, Dublin 2006.
- [8] P. SKAWINSKI: Computer integrated design and manufacturing of spiral and hypoid bevel gears. Proc. XI Inter. Conference "Computer Simulation in Machine Design – COSIM2006, Krynica Zdrój 2006.
- [9] P. SKAWINSKI: Computerized integration of design and manufacturing of spiral and hypoid bevel. Proc. XVII Inter. Conference FAIM2007, Philadelphia 2007.
- [10] P. SKAWINSKI, P. SIEMINSKI: Tooth contact generation of spiral bevel gear in environment of CAD/CAM/CAE system. Priority Program "New Technologies", Warsaw 2002.

*Received in December 2011*