

VADIM R. ALABIEV<sup>1\*</sup>, ALEXANDER V. DOZOROV<sup>2</sup>,  
IRINA A. SAVVATEEVA<sup>3</sup>, VARVARA P. DRUZYANOVA<sup>3</sup>,  
MERGEN M. SANGADZHIEV<sup>4</sup>

## ECONOMIC PRACTICABILITY OF THE IMPLEMENTATION OF THE MINE REFRIGERATION TECHNOLOGY FOR NORMALIZATION OF THERMAL CONDITIONS

The purpose of this research is to substantiate a technical solution for improving the working conditions for the thermal factor in the extraction of oil by the thermoshaft method using the mine refrigeration technology. The review of manufacturers and technical characteristics of refrigeration technology in Russia, CIS countries and Western Europe was conducted. It was shown that the use of a water cooling machine in the mine air conditioning system will reduce the air temperature in the oil production gallery to the required values and will allow to abandon the long-term construction of a surface stationary refrigeration station. Normalization of the thermal regime reduces the costs of benefits and compensation for work in harmful labor conditions and improves the quality of service of production wells by operators. The practical significance is that the proposed project for the introduction of air conditioning has a high level of profitability, and its payoff will occur in the second year of operation.

**Keywords:** drilling galleries, heat transfer fluid, mine refrigeration technology, an underground cooling machine, working thermal conditions, economic practicability.

## 1. Introduction

Yaregskoye field of heavy high-viscosity oil is unique in Russia. This is the only place where hydrocarbon production is carried out by an underground thermoshaft method. The basis of the thermoshaft method is a decrease in viscosity and an increase in oil mobility due to the formation


<sup>1</sup> KUBAN STATE TECHNOLOGICAL UNIVERSITY, 2 MOSKOVSKAYA STR., 350072, KRASNODAR, RUSSIA

<sup>2</sup> P.A. STOLYPIN ULYANOVSK STATE AGRARIAN UNIVERSITY, RUSSIA

<sup>3</sup> M.K. AMMOSEV NORTH-EASTERN FEDERAL UNIVERSITY, YAKUT STATE AGRICULTURAL ACADEMY, RUSSIA

<sup>4</sup> KALMYK STATE UNIVERSITY NAMED AFTER B.B. GORODOVIKOV, RUSSIA

\* Corresponding author: [vad.alabyev@yandex.ru](mailto:vad.alabyev@yandex.ru)



© 2020. The Author(s). This is an open-access article distributed under the terms of the Creative Commons Attribution-NonCommercial License (CC BY-NC 4.0, <https://creativecommons.org/licenses/by-nc/4.0/deed.en>) which permits the use, redistribution of the material in any medium or format, transforming and building upon the material, provided that the article is properly cited, the use is noncommercial, and no modifications or adaptations are made.

heating up to a temperature of 70-90°C with the aid of a heat transfer fluid pumped into the oil-bearing horizon (Botelho et al., 2019). A saturated water vapor with a temperature of 170-200°C is used as a heat transfer fluid. The main development system (70%) is the underground-surface system. In other cases, a one-dimensional development system is used (Gerasimov et al., 2011).

With this oil production technology, even at shallow depths with the natural temperature of the enclosing rocks 10-12°C, there are problems associated with maintaining the permissible air temperature, which can reach 50-55°C in the drilling galleries and ventilation openings (Isayevich, 2012), which significantly exceeds the permissible standards. According to the requirements of the safety rules for the Russian oil mines, the air temperature in the existing workings should not exceed 26°C at relative humidity up to 90%. In those workings, where there is no permanent presence of people during the shift, air temperature up to 36°C is allowed (Order of the Federal Service for Ecological..., 2016).

In the process of oil production, the thermal regime of the drilling galleries is mainly formed due to the thermal divisions of the enclosing rocks stipulated by the action of the heating coolant, the breakthroughs of the heating coolant from the side of the roof and the bottomhole area, as well as the heat released by the oily liquid during direct contact with air in the process of its collection and transportation by gravity method (Nor et al., 2017). The increased temperature and air humidity lead to rapid fatigue, reduced attention and labor productivity, overheating of the working organism and may be the cause of accidents.

The authors analyzed enough scientific research. It was established that the ventilation measures associated with the sectional ventilation of sloping blocks, the choice of rational ventilation schemes for operating panels and the increase in the speed of air movement in the drilling galleries are used in order to regulate the thermal regime in oil mines (Vasiliev et al., 2019). Mining measures are used to reduce the negative impact of heat emissions from various sources on the increase in air temperature in drilling galleries and workings of ventilation horizons. These include the definition of the permissible extent of mine workings depending on the magnitude of heat inflows (Sednev, 2015), the use of a closed oil collection system, as well as the thermal insulation of steam steampipes and pipelines for pumping oily liquid. The issue of reducing heat emissions from the mountain massif by concreting and thermal insulation of the walls of drilling galleries, as well as their irrigation with cold water, is being studied (Zhigalov, 2016).

However, as shown by field observations, these measures are clearly not enough to meet the required temperature standards. An increase, for example, of supplying air to the mine by 1.5 leads to a decrease in air temperature in the drilling galleries by only 1-2°C (Isayevich, 2012). Therefore, more effective measures are required. In this issue, one cannot use the experience of foreign countries, since the extraction of high-viscosity oil, for example in Canada, is conducted using technologies that do not require the constant presence of people under the ground (Nasr, 2014).

The experience of developing reservoir deposits in Germany, Poland, the Czech Republic, and Ukraine shows that artificial air cooling is used at the depths with the 45°C and higher temperature of the host rocks to normalize the thermal working conditions in the productive workings. For cooling, underground stationary and mobile air-conditioning systems for mine air (ACSMA) are used, as well as central cooling systems with superficial arrangement of refrigeration stations (Alabiyev, 2014). Proceeding from the analogy with reservoir deposits, we believe it possible to apply artificial air cooling to improve the thermal regime of the operating sloping blocks of oil mines, which belongs to the thermal engineering group of control methods (Forecasting and normalization..., 2011). However, up to now, ACSMAs have never been used

in Russian oil mines, there is no experience of their exploitation, and the economic feasibility of their use is questionable.

Consequently, the authors justified design solutions for the use of refrigeration technology to improve and normalize thermal conditions in drilling galleries in the extraction of oil underground. The analysis of economic efficiency of the accepted technical decisions was also carried out.

The purpose of this research is to substantiate a technical solution for improving the working conditions for the thermal factor in the extraction of oil by the thermoshaft method using the mine refrigeration technology.

## 2. Materials and methods

Improvement of thermal conditions by means of refrigerating machines will be considered on an example of a typical oil-extracting gallery of the Yaregskoye field. Hygrothermal air parameters along the way of its movement from the air supplying shaft trunk to the drilling gallery (Fig. 1) are presented in Table 1.

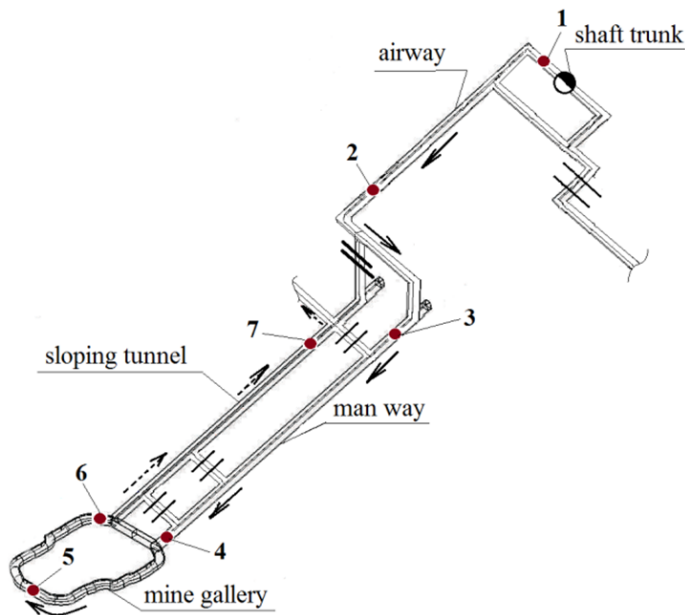


Fig. 1. The scheme of location of points of measurements along the route of the oil gallery:  
 1-7 – point of measurement hydrothermal characteristics, —> – fresh air, - - > – return air

As shown by the results of thermal surveys, the air temperature on the airborne horizon does not exceed the norms permitted by the safety rules. However, it reached its critical value and amounted to 26.0°C already at the entrance of the drilling gallery. The main increase in air temperature is observed in the drilling gallery itself and on the outgoing air jet in the slope, which is caused by the above factors. According to the results of thermal surveys, it is determined that

TABLE 1

Heat and humidity parameters of the air along the route of the oil gallery

The number of the measurement point (Fig. 1)	The air temperature, $t$ , °C	Relative humidity, %	The moisture content of the air, g/kg	The enthalpy of the air, kJ/kg
1	6	46	2,6	12,6
2	18	48	6,0	33,3
3	21	43	6,5	37,6
4	26	39	8,0	46,5
5	37	65	25,5	102,8
6	39	60	26,3	106,9
7	49	78	60,5	205,9

the cooling demand of the drilling gallery, provided that the air temperature at the end of the slope does not exceed 35.0°C, is about 1000 kW (Fig. 2).

Usually in an underground oil producing enterprise, 5-6 drilling galleries are in operation at the same time. Based on the assumption that the remaining drilling galleries have the same cold demand, we can conclude that normalizing the thermal conditions within the enterprise will require a cooling capacity of about 5-6 MW. The realization of such cooling capacity by underground cooling means in oil mines' conditions is impossible, since the issues of placing

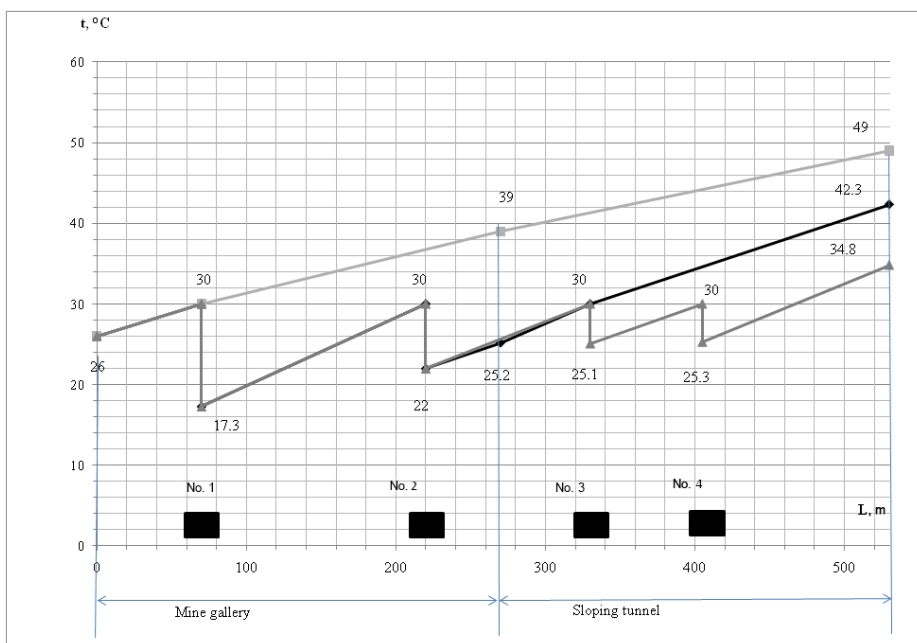


Fig. 2. The change in temperature oil gallery:

■ – air cooler; ◆ – air temperature at artificial cooling of 500 kW; ◻ – air temperature at natural mode; ▲ – air temperature at artificial cooling of 1000 kW

refrigerator machines and removing the heat of refrigerant condensation in mine workings seem to be an intractable task. In such cases, it is necessary to construct an ACSMA with a surface location of the refrigeration station. However, the construction period for such facilities takes at least 4-5 years (the development of an air conditioning project, its expertise, certification of foreign refrigeration equipment, construction of a surface refrigeration plant complex, equipment installation, pipelines, etc.), and the problem of normalizing thermal conditions must be solved today already.

At the initial stage, it is proposed to introduce an underground cooling machine of a water-cooling type with a power of 500 kW to normalize the thermal conditions in one drilling gallery. For this purpose, the compressor-and-condenser unit of the refrigeration machine is located in the broadening of the air-producing horizon, and the air coolers (2 pieces of 250 kW) are located directly in the drilling gallery itself at points where the air temperature exceeds the norms allowed by the safety rules (Fig. 3). In this case, the air temperature at the outlet of the drilling gallery does not exceed 26.0°C (Fig. 2).

The water cooler for removing the condensing heat of the refrigerating machine is located in one of the workings located in the immediate vicinity of the air-supplying shaft trunk (Fig. 3). The term of commissioning such an ACSMA into operation taking into account design and survey and certification works will not exceed 1 year.

When implementing this approach, the following tasks will be accomplished:

1. Complete normalization of thermal working conditions in the drilling gallery and a significant improvement in thermal conditions in a sloping production in a relatively short time;

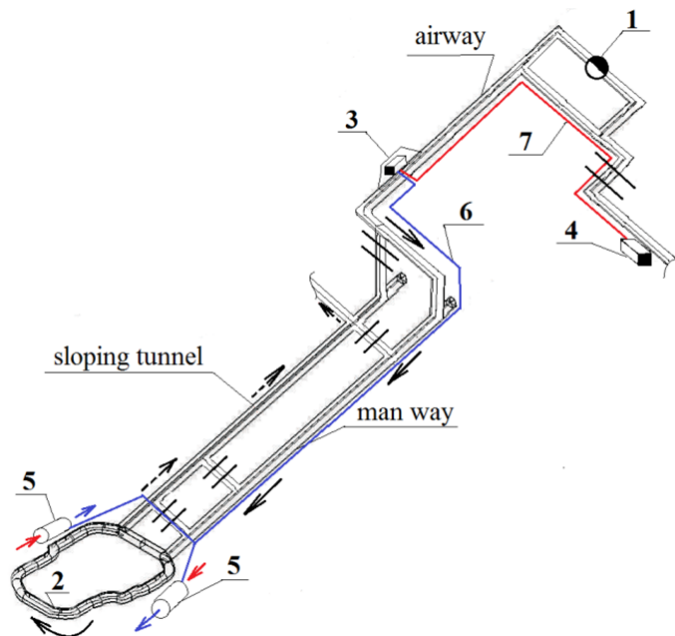


Fig. 3. The scheme of arrangement of underground water-cooling refrigerating machines with a capacity of 500 kW into the mine: 1 – shaft trunk; 2 – mine gallery; 3 – refrigerating machine; 4 – water cooler; 5 – air cooler; 6 – supply pipeline; 7 – return pipeline; —> – fresh air; - - > – return air

2. Training of the personnel of the oil-producing underground enterprise to work with the mine refrigeration equipment, the acquisition of the necessary skills for servicing the ACSMA;
3. Installation of the possibility of operation of refrigeration equipment for specific conditions typical for oil mines;
4. Making a final decision on further ways to normalize thermal conditions (surface or underground machines, their power, location, etc.).

The review of the producers of mine refrigeration equipment in the mine explosion-proof execution showed that only the air conditioning mine KShR-350N, manufactured by NPO Aerosphere (Perm), is produced at present (Levin, 2013). This air conditioner, designed on the wheelbase for mine conditions, has a rated output of 350 kW. This fact, as well as the overall dimensions and operation principle of KShR-350N, does not allow to recommend it for use in the conditions under consideration.

Of the CIS countries, currently only the OJSC “Kholod-mash” (Odessa, Ukraine) produces refrigeration equipment. The KPSH300 air conditioner, which is produced by this company, is designed to cool air in coal mines, although it has suitable overall dimensions for the conditions under consideration, also cannot be recommended for use due to insufficient cooling capacity and the principle of producing artificial cold (Mobile mine air...).

Among European manufacturers, there are such recognized leaders as WAT (Germany), Eurotech and Termospec (Poland) (Products and services...; Eurotech...; Termospec...). The produced refrigeration equipment of these companies is characterized by a wide range of nomenclature that allows satisfying any demand in the required refrigeration capacity. Composition and technical characteristics of the equipment of these companies are approximately the same. It can only be noted that WAT heat exchangers have a cylindrical shape instead of a rectangular due to the double screw cooling elements (Fig. 4), so that the heat transfer coefficient of these devices is much higher, and the overall dimensions are smaller, which is an advantage when using them in cramped conditions of underground workings.

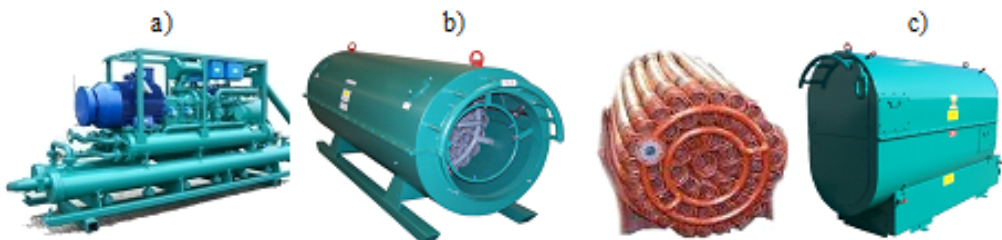


Fig. 4. Refrigeration equipment company WAT: a) refrigerating machine IDV600; b) the air cooler RWK250; c) the water cooler RK600

The cost of a set of basic refrigeration equipment, for example, WAT, which includes: a mechanical unit (Fig. 4a), two air coolers of 250 kW of cold each (4b) and a 600 kW water cooler (Fig. 4c) are approximately 600 thousand euros. Taking into account design and installation works, acquisition of auxiliary equipment and materials (pipelines, pumps, water tanks, shut-off valves, etc.), investments in the implementation of the ACSMA will amount to no less than 1 million euros.

### 3. Results and discussion

To determine the feasibility of investing in the introduction of refrigeration technology in oil mines, we will determine the economic efficiency of the project, provided that the project implementation period is equated to the useful life of the equipment and is assumed equal to 10 years. We will define the changes in the parameters included in the formula of net present value (NPV) as the resultant indicator of the effectiveness of the investment project for 1 year of the project. In constructing the model for determining economic efficiency, we use the assumption of the invariance of the parameters during the project implementation.

1. Changes in revenues due to increased production volumes because of the ability of operators to serve production wells per year more often:

$$\Delta_B = Q \cdot C \cdot \%_{in} / 100 = 150 \cdot 23,41 \cdot 0,03 \cdot 365 = 38450,92 \text{ thousand rubles/year} \quad (1)$$

where:

$Q$  — daily oil production in the drilling gallery, t. (determined based on the annual oil production at the Yaregskoye field (Annual report, 2016));

$C$  — cost of 1 ton of Urals oil, thousand rubles. (determined based on the data of the Ministry of Finance for September-October 2017 (The message of the Ministry of Finance..., 2012));

$\%_{in}$  — percentage of increase in oil production as a result of working conditions normalization (provisionally accepted 3%).

2. Change in operating costs:

- 2.1. As a result of the reduction in the costs of benefits and compensation for work in unfavorable working conditions for the year:

$$P_l = W_p \cdot ZP \cdot \%_d / 100 = 25 \cdot 57,5 \cdot 0,4 \cdot 12 = 6900 \text{ thousand rubles} \quad (2)$$

where:

$W_p$  — is the average number of people employed in work performed in mine workings with an air temperature of +30°C or higher (oil production operators);

$ZP$  — average salary of the operator of oil production, thousand rubles. (adopted equal to the average wage for workers employed in the work on the extraction of crude oil and natural gas in 2015 (Operational information..., 2015));

$\%_d$  — percentage of surcharges for benefits and compensation for work in unfavorable conditions (provisionally accepted 40%).

- 2.2. As a result of the reduction in the class of working conditions from 3.2 to 2 in a year:

$$P_{lc} = W_p \cdot ZP \cdot \%_{3,2,2} / 100 = 25 \cdot 57,5 \cdot 0,04 \cdot 12 = 690 \text{ thousand rubles/year} \quad (3)$$

where:  $\%_{3,2,2}$  — percentage of surcharge for work in hazardous working conditions (4%) (The Labour Code...).

- 2.3. As a result of changes in payments for insurance contributions due to a change in the wage fund:

$$P_{ins} = (P_l + P_{lc}) \cdot \%_{ins} / 100 = 7590 \cdot 0,3 = 2277 \text{ thousand rubles/year} \quad (4)$$

where:  $\%_{ins}$  — insurance premiums (30%).

- 2.4. As a result of changes in payments for insurance contributions in case of accidents due to changes in the wage fund:

$$P_{ins.n} = (P_l + P_{lc}) \cdot \%_{ins.n} / 100 = 7590 \cdot 0,085 = 645,15 \text{ thousand rubles/year} \quad (5)$$

where:  $\%_{ins.n}$  — insurance contributions in case of accidents (8.5%).

- 2.5. As a result of changes in the costs of equipment maintenance, fuel and lubricants, ordinary repairs:

$$P_{maint} = 0,1 \cdot Amortization = 0,1 \cdot 6870000 = 687 \text{ thousand rubles/year} \quad (6)$$

Expenses for equipment maintenance, fuel and lubricants, ordinary repairs are taken equal to 10% of depreciation charges for equipment.

- 2.6. As a result of a change in the cost for electricity required for the operation of the 500 kW ( $P_{el.c}$ ) mine refrigeration equipment per year (Table 2). The electricity cost is accepted according to (Order of the Ministry of Construction..., 2017).

TABLE 2

Electricity costs

Name of the equipment	Engine power, kW	The number	The electricity tariff, RUB/kW.h	Energy costs, RUB
Refrigerating machine IDV600	160	1	0,96	1 345 536
The air cooler RWK250	25	2		420 480
The water cooler RK600	60	1		504 576
TOTAL:				2 270 592

- 2.7. As a result of changes in production costs due to the increase in oil production:

$$P_{o.p} = P_{ud} \cdot Q \cdot \%_{in} = 1766,86 \cdot 150 \cdot 365 \cdot 0,03 = 2902 \text{ thousand rubles/year} \quad (7)$$

where  $P_{ud}$  — the value of unit costs for oil production, is equal to 241 rubles per barrel of oil (PJSC “LUKOIL”). In terms of ton, this value will amount to 1.766.86 rubles/ton.

Thus, the total value of the change in operating costs:

$$\begin{aligned} \Delta_{\text{O}} &= -P_l - P_{lc} - P_{ins} - P_{ins.n} + P_{maint} + P_{el.c} + P_{o.p} = \\ &= -6900 - 690 - 2277 - 645,15 + 687 + \\ &+ 2270,59 + 2902 = -4652,6 \text{ thousand rubles/year} \end{aligned} \quad (8)$$

Calculations for the definition of net present value (NPV) are presented in Table 3. The efficiency calculation was based on the 15% discount rate accepted by PJSC “LUKOIL” (Kruk & Pavlov, 2013). The conducted calculations also took into account changes in the property tax and income tax. The calculated performance indicators of the investment project are presented in Table 4. The effectiveness period was determined graphically, based on the analysis of the net present value as a cumulative result of time (Fig. 5).



TABLE 3

Economic efficiency of the project

No.	Indicator	Designation	Periods, years									
			0	1	2	3	...	8	9	10		
1	2	3	4	5	6	7	8	9	10			
1	Change in revenue (excluding VAT), rub	$\Delta_B$		38450925	38450925	38450925		38450925		38450925		38450925
1.1	The cost of 1 ton of Urals oil, rubles/ton.			23410	23410	23410		23410		23410		23410
1.2	Increase in production, t	$365 \cdot Q^*$		1642,5	1642,5	1642,5		1642,5		1642,5		1642,5
2	Change in operating costs, rub	$\Delta_3$		-3281340,45	-3281340,45	-3281340,45		-3281340,45		-3281340,45		-3281340,45
2.1	Change in the wage fund due to reduction of costs for benefits and compensation for work in unfavorable working conditions, rub	$P_l$		-6000000	-6000000	-6000000		-6000000		-6000000		-6000000
2.2	Change in the wage fund due to the reduction of the class of working conditions from 3.2 to 2 per year, rub	$P_{lc}$		-600000	-600000	-600000		-600000		-600000		-600000
2.3	Change in payments for insurance contributions due to a change in the wage fund, rub	$P_{ins}$		-1980000	-1980000	-1980000		-1980000		-1980000		-1980000
2.4	Change in payments for insurance contributions in case of accidents due to changes in the wage fund, rub	$P_{ins.n}$		-561000	-561000	-561000		-561000		-561000		-561000

TABLE 3. CONTINUED

1	2	3	4	5	6	7	8	9	10
2.5	Change in maintenance costs for equipment, fuel and lubricants, ordinary repairs, rub	$P_{maintenance}$		687000	687000	687000		687000	687000
2.6	Change in electricity costs, rub	$P_{el.c.}$		2270592	2270592	2270592		2270592	2270592
2.7	Change in oil production costs, rubles	$P_{hid}$		2902067,55	2902067,55	2902067,55		2902067,55	2902067,55
3	Investments, rub		68700000						
4	Change in taxes, rub			1360260	1209120	1057980		151140	0
4.1	Increase in property tax due to commissioning of cooling equipment, rub			1360260	1209120	1057980		151140	0
5	Change in depreciation, rub			6870000	6870000	6870000		6870000	6870000
6	Change in profit before taxation, rub			33502005,45	33653145,45	33804285,45		34711125,5	34862265,5
7	Change in income tax, rub			6700401,09	6730629,09	6760857,09		6942225,09	6972453,09
8	Change in net profit, rub			26801604,36	26922516,36	27043428,36		27768900,4	27889812,4
9	Cash flow, rub		-68700000	40541604,36	40662516,36	40783428,36		41508900,4	41629812,4
10	Discount coefficient		1	0,869565217	0,756143667	0,657516232		0,28426241	0,24718471
11	Net present value, rub		-68700000	35253569,01	30746704,24	26815766,16		11799420,1	10290252,9
12	Net present value of accumulated total, rub		-68700000	-33446430,99	-2699726,749	24116039,41		126531702	136821955

TABLE 4

The main indicators of economic efficiency of the project

Parameter	The value
Net Present Value, rub	136821954,5
IRR, %	59%
DPI, unit	2,99
Pay-off period, years	2

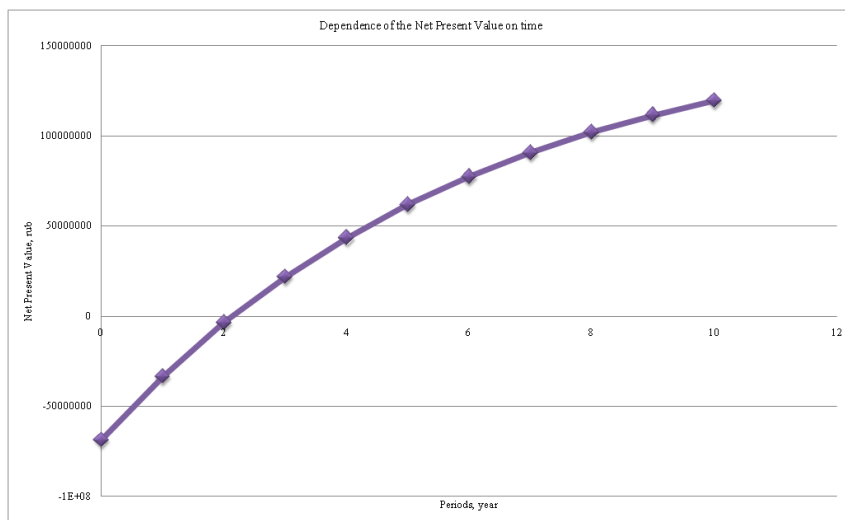


Fig. 5. Dependence of the Net Present Value on time

On the basis of the obtained indicators (Table 4), we can conclude that it is economically feasible to implement and attract such an investment project, since the value of net discounted income significantly exceeds the zero mark. In addition, estimating the obtained value of the internal rate of return in 59%, we can speak of stability and a sufficiently low risk of the project. The event has a high level of profitability, as evidenced by the high value of the investment return index of 3.48. The pay-off period of the project already happens in the second year of the project realization. Also, the results of the sensitivity analysis performed indicate the sustainability of the project (Table 5 and Fig. 6) (Kruk & Nikulina, 2016).

TABLE 5

Method of control points

Parameter	The base value	The critical value	Relative change, %
Change in revenue, rub	38450925	4373320,12	-88,63
Change in operating costs, rub	-3281340,45	30796264,11	-1038,53
Investments, rub	68700000	497398495	624,02
Rate of discount, %	15	59	293,33

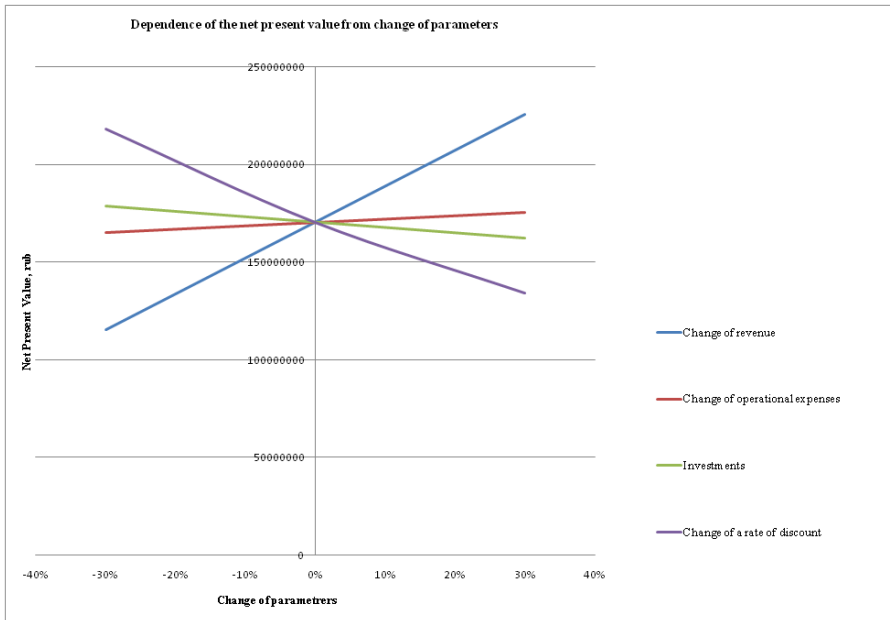


Fig. 6. The method of rational ranges

Analyzing the data obtained in the course of the risk analysis by the sensitivity analysis method, we can confidently speak of the stability of such an investment project and its non-adherence to the influence of external factors on the resulting indicator, which was chosen as the net present value (Fig. 5).

## 4. Conclusions

1. In the oil well drilling galleries, the values of the heat and humidity parameters of air significantly exceed the norms permitted by the safety rules. The introduction of an underground water-cooling refrigeration machine with a capacity of 500 kW will ensure the air temperature in the drilling gallery in accordance with the requirements of safety rules for oil mines.
2. Normalization of thermal working conditions in the drilling gallery will reduce the class of working conditions and lead to a reduction in the costs of benefits and compensation for work in adverse climatic conditions, an increase in production due to the ability of operators to more often serve production wells.
3. Analysis of the economic efficiency of the introduction of refrigeration technology showed that such a project has a high level of profitability and payback will occur in the second year after the introduction of the air-conditioning system.

Based on the results of the performed analysis, it can be said that the project for the implementation of the ACSMA in the oil mine is most sensitive to changes in the revenue parameter.

This is also evident both from the graph of the dependence of the net present value on the change in parameters (the line describing the change in the NPV from the change in revenue is steeper than the rest with respect to the horizontal axis), and by a relative change – 88.63%. However, the significance of the relative change in the revenue parameter tells us that it is very unlikely that such a situation, in which the project is not going to be profitable, will occur. Given the current situation on the world oil market, the level of oil prices will have a minor impact, since the revenue should decrease by almost 100% in order to make the project unprofitable.

### Disclosure of interest

The authors have no conflict of interest to declare.

### References

- AlabiyeV V.R, 2014. *The basic directions of development of ways and means of air cooling in coal mines of Ukraine*. Bulletin of Transbaikal State University **06** (109), 35-46.
- Annual report 2016. A sea of opportunities (PJSC “Lukoil”). Available at: <http://www.lukoil.ru/InvestorAndShareholder-Center/ReportsAndPresentations/AnnualReports> (accessed 06 November 2017).
- Botelho T.I.M., Figueiredo G.S., Praxedes F.M., Teixeira J.V.U., Monteiro E.B., 2019. *Influence of the use of Carapa guianensis oil (andiroba oil) compared with commercial cutting fluid in the turning process of the ABNT 1045 steel grades*. Periodico Tche Quimica **16** (33), 927-935.
- Eurotech. Available at: [http://www.compensus.pl/eurotech\\_folder.pdf](http://www.compensus.pl/eurotech_folder.pdf) (accessed 10 October 2017)
- Forecasting and normalization of thermal conditions in coal mines: COY-H 10.1.00174088.027-2011. Official publ. Kyiv: Ministry of Energy and Coal Industry of Ukraine, 188.
- Gerasimov I.V., Konoplev Yu.P., Gulyaev V.E., 2011. *Integrated development of the Yaregskoye oil and gas field*. The Territory of Oil and Gas **11**, 26-31.
- Isayevich, A.G. 2012. *Peculiarities of airing oil mines. Strategy and processes of development of geo-resources*, Perm: GI UB RAS **10**, 247-248.
- Kruk M.N., Nikulin A.Ju., 2016. *Economic estimation of project risks when exploring sea gas and oil deposits in the Russian arctic*. International Journal of Economics and Financial Issues **6** (2), 138-150.
- Kruk M.N., Pavlov A.N., 2013. Possibilities for assessing geological and economic risks in the development of mineral resources in the Arctic seas of Russia. St. Petersburg: RSHU, 101.
- Levin L.Yu., 2013. *Development of a mine underground air conditioning plant for the conditions of the deep mine “Taimyrsky”*. Strategy and Processes of Georesources Development, Perm: GI UrB RAS **11**, 253-255.
- Mobile mine air-conditioning KPSH-300. Available at: <http://holodmash.od.ua/ru/kpsh-300/> (accessed 21 October 2017).
- Nasr T.N., 2014. *Heavy oil recovery in Russia: following the Canadian lead SAGD & ES-SAGD technologies*. Rogtec, **7**, 78-85
- Nor M.A., Nor Ye.V., Tskhadaya N.D., 2017. *Sources of a heating microclimate in the development of deposits of high-viscosity oils by the thermoshaft method*. Notes of the Mining Institute, 360-363. DOI: 10.18454/PMI.2017.3.360
- Operational information of the Federal State Statistics Service Data on the wages of employees of organizations by categories of personnel and professional groups of employees for October 2015. (published on 04.04.2016) Available at: [http://www.gks.ru/wps/wcm/connect/rosstat\\_main/rosstat/ru/statistics/wages/labour\\_costs/#](http://www.gks.ru/wps/wcm/connect/rosstat_main/rosstat/ru/statistics/wages/labour_costs/#) (accessed 06 November 2017).
- Order of the Federal Service for Ecological, Technological and Nuclear Supervision dated 28.11.2016 No. 501 “On Approval of Federal Norms and Rules in the Field of Industrial Safety” Rules for Industrial Safety in the Development of Oil Fields by Mine Method “(Registered 21.12.2016 No. 44837). Available at: <http://publication.pravo.gov.ru/Document/View/0001201612220026> (accessed 04 November 2017).

- Order of the Ministry of Construction, Tariffs, Housing and Communal Services of the Republic of Komi No. 15/1-T "On Establishing Tariffs for Electric Energy (Power) Supplied by the USA Energy Center 000 "LUKOIL-Komi" dated March 20, 2017. Available at: <http://docs.cntd.ru/document/446167691> (accessed 06 November 2017).
- PJSC "LUKOIL". Management's analysis of the financial condition and results of operations for 2016, 2015 and 2014. Available at: <http://www.lukoil.ru/FileSystem/PressCenter/93362.pdf> (accessed 23 October 2017)
- Products and services. Available at: <http://www.wat-klima.com/en/products-services-23.html> (accessed 10 October 2017)
- Sednev D. Yu., 2015. *Criterion of the length of mine workings by the thermal factor when designing sloping blocks of oil mines. Actual problems of increasing the efficiency and safety of exploitation of mining and oilfield equipment*, Perm: PNIPU, 205-209.
- Termospec. Available at: <http://www.termospec.pl/klimatyzacja.html#> (accessed 10 October 2017).
- The Labour Code of the Russian Federation. Available at: <http://tkodeksrf.ru/> (accessed 06 November 2017).
- The message of the Ministry of Finance of the Russian Federation, 15.06.2012. Available at: [https://www.minfin.ru/ru/search/?q\\_4=нефть&pub\\_date\\_from\\_4=16.10.2017&pub\\_date\\_to\\_4=16.10.2017&page\\_id\\_4=0&source\\_id\\_4=6#](https://www.minfin.ru/ru/search/?q_4=нефть&pub_date_from_4=16.10.2017&pub_date_to_4=16.10.2017&page_id_4=0&source_id_4=6#) (accessed 06 November 2017).
- Vasiliev S.I., Fomina N.V., Lapushova L.A., Fedotova A.S., Zhuravlev D.N., 2019. *Bioecological diagnostics of oil-contaminated soil remediated with polymeric sorbents*. *Periodico Tche Quimica* **16** (33), 641-649.
- Zhigalov V.S., 2016. *Application of thermal insulation of mine workings in the conditions of oil fields of the Yaregskoye field. Strategy and processes of development of geo-resources*. Collection of scientific works. Perm: Mining Institute of the Ural Branch of the Russian Academy of Sciences, 301-303.